
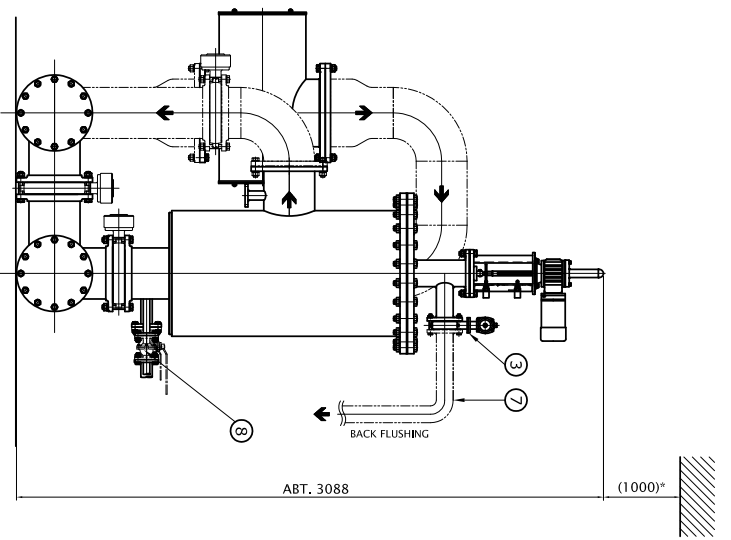
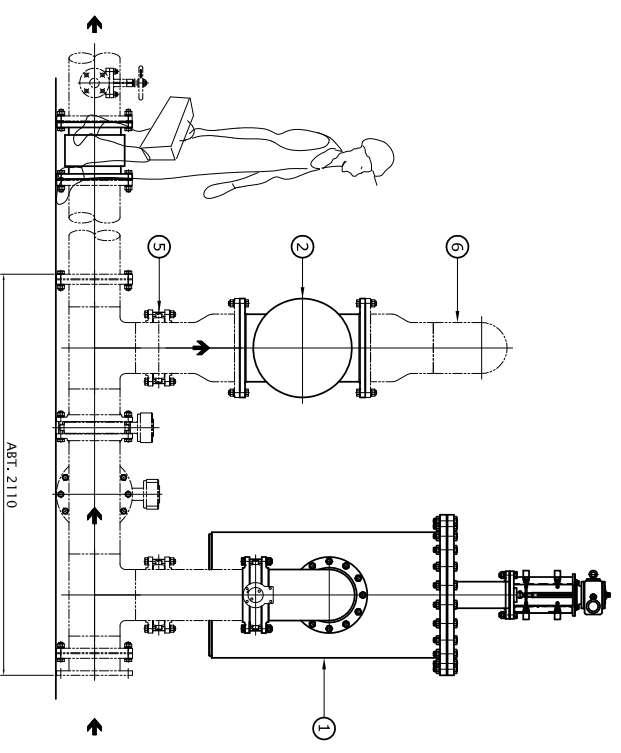
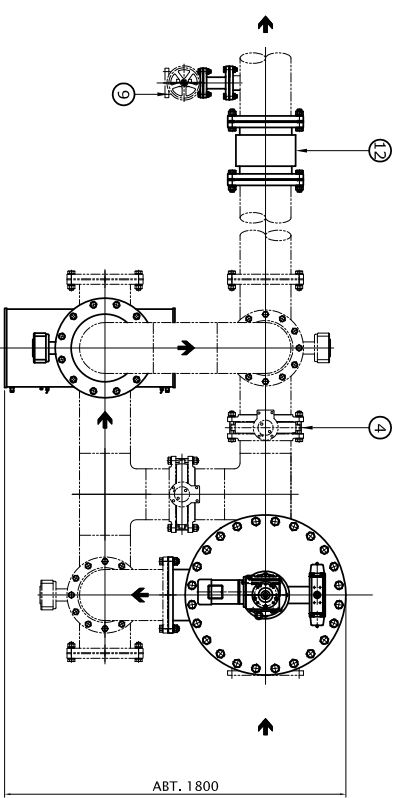


REV.	DATE	REASON

GloEn-Patrol™ Ballast System

Model : GloEn-P350

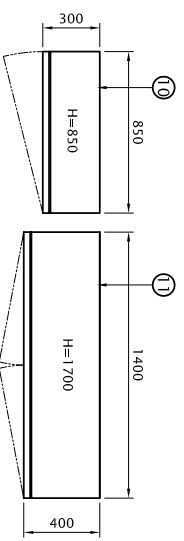

※Specification
 Flow rate : 350 m³/h
 Filtration degree : 50 micron
 Fluid : ballast water
 Power supply : 380/440VAC
 3phase 60HZ

12	FLOW METER	1	-			
11	BWMS BALLAST PANEL	1	SS400			
10	BWMS CONTROL PANEL	1	SS400			
9	SAMPLING VALVE(50A)	1	-			
8	DRAIN VALVE(25A)	1	-			
7	PIPE 80A	1	SS400	YARD SUPPLY		
6	PIPE 250A	1	SS400	YARD SUPPLY		
5	FLOW CONTROL V./V(250A)	1	FC	YARD SUPPLY		
4	AUTO BUTTERFLY V./V(250A)	4	FC	YARD SUPPLY		
3	BACK FLUSHING V./V	1	FC	YARD SUPPLY		
2	UV UNIT	1	SUS316			
1	FILTER UNIT(500m ² /h)	1	SS400			
NO.	DESCRIPTION	QTY	MAT'L	REMARK		
SCALE	ANGLE	UNIT	DATE	DRAWN	CHK'D	APPR'D
N/S	3rd	mm	2010.12.13	C.S.PARK	T.S.PYO	T.S.PYO

PROJECT TITLE
 REFERENCE
 Layout of GloEn-P350

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BROUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. PANASIA CO., LTD.



DWG NO.

GP35L002

PAGE :